




GNPGraystar

Specialty Materials

AN ISO 9001 CERTIFIED COMPANY

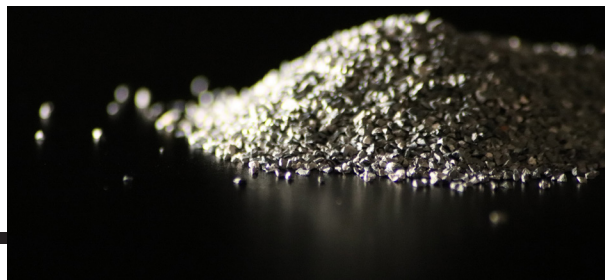

TECHNICAL DATA SHEET

Alumina Zirconia 40%

Typical Chemistry

Aluminum Oxide (Al_2O_3)	60.0 %
Zirconium Oxide (ZrO_2)	39.0 %
Titanium Dioxide (TiO_2)	0.25 %
Silicon Dioxide (SiO_2)	0.33 %
Iron Oxide (Fe_2O_3)	0.25 %
Sodium Oxide (Na_2O)	0.03 %
Calcium Oxide (CaO)	0.09 %
Magnesium Oxide (MgO)	0.02 %

Physical Characteristics

Crystal Size	12 Microns
True Density	4.60 g/cm ³
Melting Point	1900°C
Hardness	Knoop (100): 1600 Mohs: 9.0
Loose Pack Density:	1.90 - 2.30 g/cm ³
Bulk Density Range	126-146 lbs./ft ²

Test Methods

Chemistry	ANSI B74.14
Bulk Density	ANSI B74.4
Sizing	ANSI B74.12-2003

Description:

GNPGraystar's Alumina Zirconia 40% is a hard, very tough, sharp abrasive. It is produced by fusing zircon sand and alumina at about 1900°C.

Applications:

GNPGraystar's Alumina Zirconia 40% is used for both coated abrasive products and organic bonded grinding wheels.

info@GNPGraystar.com

Rev. 02/2020

Northern Office

37 John Glenn Dr.
Amherst, NY 14228
716.759.6600

www.GNPGraystar.com

Southern Office

9 Simmonsville Rd.
Bluffton, SC 29910
843.815.5600