




# GNP Graystar

Specialty Materials

AN ISO 9001 CERTIFIED COMPANY

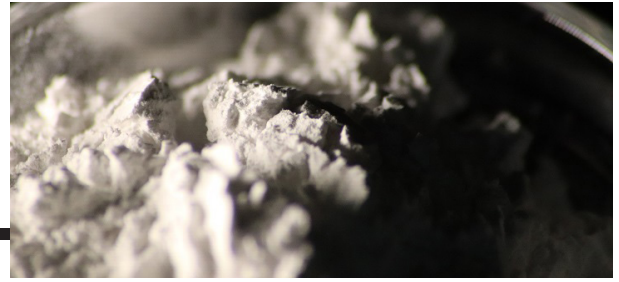

## TECHNICAL DATA SHEET

### Calcined Yttrium Oxide

#### Typical Chemistry

	99.9 %	99.99%	99.999 %
<b>In Material</b>			
TREO *	≥ 99.0	≥ 99.0	≥ 99.0
LOI (1000°C/2 hrs) - %	≤ 1.0	≤ 1.0	≤ 1.0
Iron Oxide (Fe <sub>2</sub> O <sub>3</sub> ) - ppm	< 50	< 20	< 5
Calcium Oxide (CaO) - ppm	< 60	< 30	< 10
Sodium Dioxide (Na <sub>2</sub> O) - ppm	< 60	< 30	< 10
Silicon Dioxide (SiO <sub>2</sub> ) - ppm	< 500	< 250	< 50
Aluminum Oxide (Al <sub>2</sub> O <sub>3</sub> ) - ppm	< 250	< 150	< 50
Potassium Dioxide (K <sub>2</sub> O) - ppm	< 60	< 30	< 10

#### In 100 TREO

Yttrium Oxide (Y <sub>2</sub> O <sub>3</sub> )	≥ 99.9	≥ 99.99%	≥ 99.999 %
Total Remaining RE-Oxides - %	≤ 0.1	≤ 0.01	≤ 0.001

\* TREO - Total Rare Earth Oxides

#### Typical Physical Characteristics

	≥ 99.9	≥ 99.99%	≥ 99.999 %
PSD (d50) - microns	2 - 10	2 - 10	2 - 10
Surface Area (BET) - m <sup>2</sup> /g	2 - 12	2 - 12	2 - 12

#### Description:

GNP Graystar's Calcined Yttrium Oxide is a white powder, insoluble in water, but soluble in acids. It is typically used in the manufacturing of mono and polycrystalline ferrite materials in the electronic industry, for the synthesis of gemstones, as a glass additive to increase the refractive index and reduce light dispersion in glass, such as camera lenses, for optical systems and lenses for extreme temperatures, for refractory and conductive ceramics, oxygen sensors for emission control, for the production of ceramic pigments, as well as pole impregnation in batteries, lasers, and accumulators.

[info@GNPGraystar.com](mailto:info@GNPGraystar.com)

Rev. 02/2020

**Northern Office**  
37 John Glenn Dr.  
Amherst, NY 14228  
716.759.6600

[www.GNPGraystar.com](http://www.GNPGraystar.com)

**Southern Office**  
9 Simmonsville Rd.  
Bluffton, SC 29910  
843.815.5600